SR 8500 / SD 870x

Versatile epoxy system for composite applications

SR 8500 / **SD 870x** system has been developed for production of technical composite structures using hand layup & vacuum bagging techniques.
We carefully took care in selecting CMR and SVHS free raw materials to improve hazard labelling and assure the best working conditions for users.

		SD 8705	SD 8703	SD 8702	SD 8701
Reactivity level					
Initial viscosity (mPa.s)	@ 20 °C	2 980	1 435	1 015	660
	@ 30 °C	1 940	800	590	310
Pot Life (100 g)	@ 20 °C	35 min	01 h 40	04 h 00	05 h 00
	@ 30 °C	15 min	30 min	50 min	02 h 00
Mixing ratio					
	By weight	100 / 35	100 / 35	100 / 35	100 / 35
	By volume	-	-	-	-
Maximum strength	N/mm^2	85	77	72	69
% Elongation at max strength	%	4,3	4,1	4,2	4
TG1 max onset	°C	93	88	88	87
Gel Time (1 mm)	@ 20 °C	03 h 40	08 h 20	11 h 30	21 h 20
	@ 30 °C	02 h 00	04 h 20	06 h 30	11 h 40
Time to reach 400 mPa.s	@ 20 °C	01 h 15	03 h 50	05 h 45	11 h 40
	@ 30 °C	58 min	02 h 20	03 h 40	07 h 05
Demold time	@ 20 °C	11 h 00	25 h 00	34 h 30	64 h 00
	@ 30 °C	06 h 00	13 h 00	19 h 30	35 h 00

SR 8500 / **SD 870x** system has been developed for production of technical composite structures using hand layup & vacuum bagging techniques.
We carefully took care in selecting CMR and SVHS free raw materials to improve hazard labelling and assure the best working conditions for users.
Its medium viscosity is formulated from the latest chemistry technologies which allows to reduce drainage of vertical laminates and keep oustanding wetout of heavyweight fabrics.

SR 8500 is available with large range of hardeners mixable in any proportions in order to achieve the wanted reactivities.

SR 8500 / **SD 870x** cures at ambient temperature and give its highest properties after moderate postcures 40-60°C
hardeners

SD 8705
Ultra fast hardener. It is used as **SD 8701** accelerator.
Reactivity adapted for the manufacturing of small parts.
Good mechanical properties after ambient curing.

SD 8701
Ultra Slow Hardener.
Reactivity adapted for big part manufacturing
Recommended post cure at 40 °C before unmoulding

Epoxy resin SR 8500

Appearance		liquid
Color		yellow
Gardner color		≤ 2
Viscosity (mPa.s)	@ 15 °C	28500 ± 5500
	@ 20 °C	10475 ± 2075
	@ 25 °C	4650 ± 950
	@ 30 °C	2450 ± 550
	@ 40 °C	750 ± 200
Density	@ 20 °C	1,1800
Refractive index	@ 25 °C	1,576 ± ,002
Storage (months)	@ Ta	24

Hardener(s)

		SD 8705	SD 8703	SD 8702	SD 8701
Appearance		liquid	liquid	liquid	liquid
Color		yellow	light yellow	colourless	light yellow
Gardner color		≤ 6	≤ 5	≤ 4	≤ 2
Reactivity level					
Viscosity (mPa.s)	@ 15 °C	475 ± 95	68 ± 14	38 ± 8	18 ± 4
	@ 20 °C	300 ± 60	50 ± 10	28 ± 6	14 ± 3
	@ 25 °C	200 ± 40	38 ± 7	23 ± 4	12 ± 2
	@ 30 °C	140 ± 30	29 ± 6	18 ± 3	10 ± 2
Density	@ 20 °C	1,0200	0,9800	0,9700	0,9510
Refractive index	@ 25 °C	0 ± 0	0 ± 0	0 ± 0	1,45 ± ,002
Storage (months)	@ Ta	24	24	24	24

Mixe(s) SR 8500 / SD 870x

		SD 8705	SD 8703	SD 8702	SD 8701
Appearance		liquid	liquid	liquid	liquid
Color		yellow	light yellow	light yellow	colourless
Mixing ratio					
	By weight	100 / 35	100 / 35	100 / 35	100 / 35
	By volume	-	-	-	-
Density	@ 20 °C	1,18	1,18	1,17	1,18
Initial viscosity (mPa.s)	@ 20 °C	2 980	1 435	1 015	660
PP 50 mm / 10 s^{-1}	@ 30 °C	1 940	800	590	310

Reactivity @ 20 °C for 100 g SR 8500 / SD 870x

	SD 8705	SD 8703	SD 8702	SD 8701
Exothermic temperature (°C)	163	152	62	36
Exothermic peak time	40 min	01 h 50	04 h 30	09 h 00
Time to reach 50 °C	35 min	01 h 40	04 h 00	-

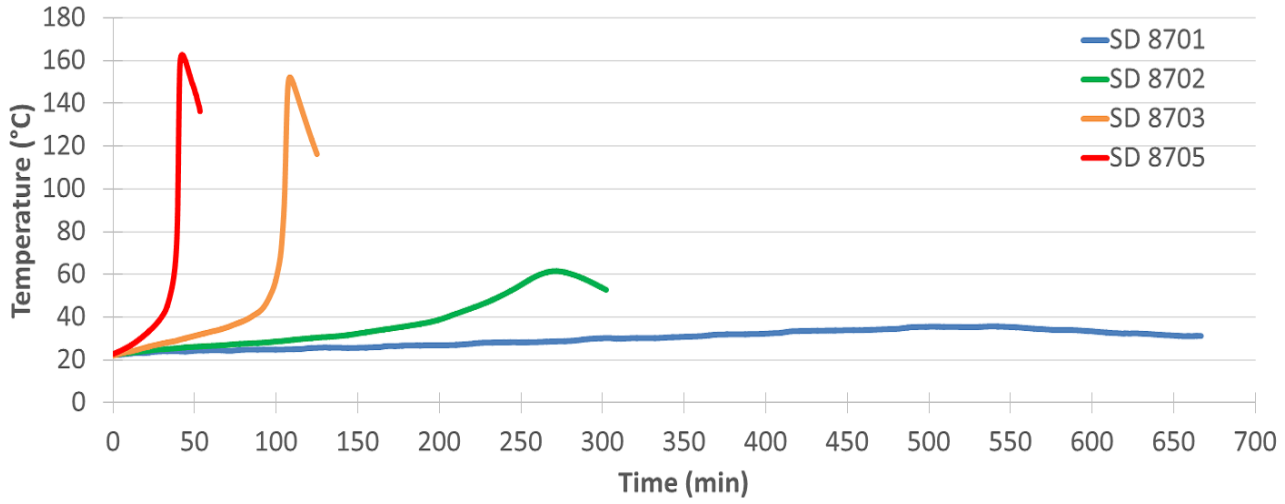

Reactivity @ 30 °C for 100 g SR 8500 / SD 870x

	SD 8705	SD 8703	SD 8702	SD 8701
Exothermic temperature (°C)	165	184	169	100
Exothermic peak time	20 min	45 min	01 h 10	03 h 00
Time to reach 50 °C	15 min	30 min	50 min	02 h 00

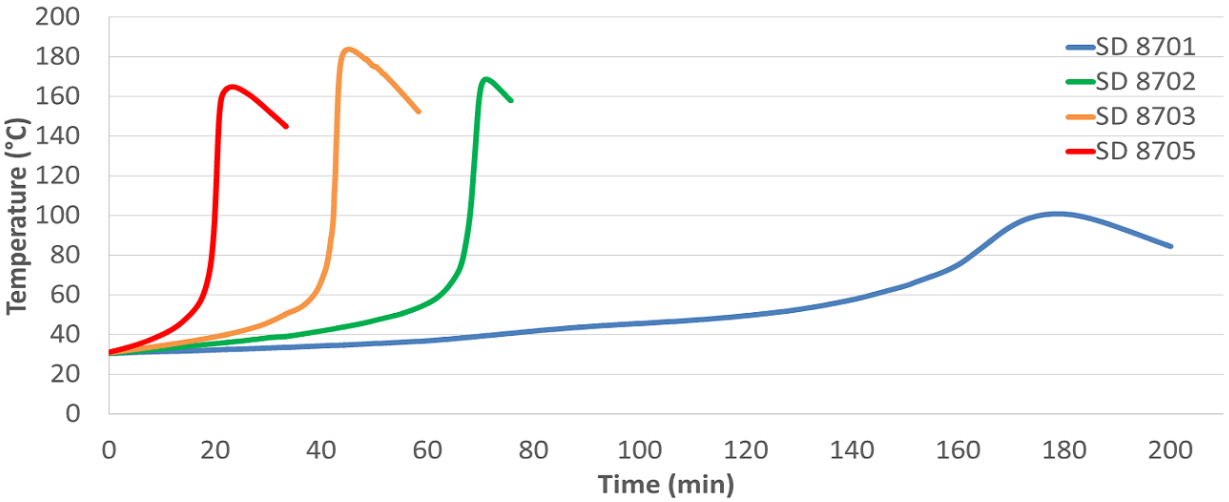

Reactivity on 1 mm thick layer

@ 20 °C

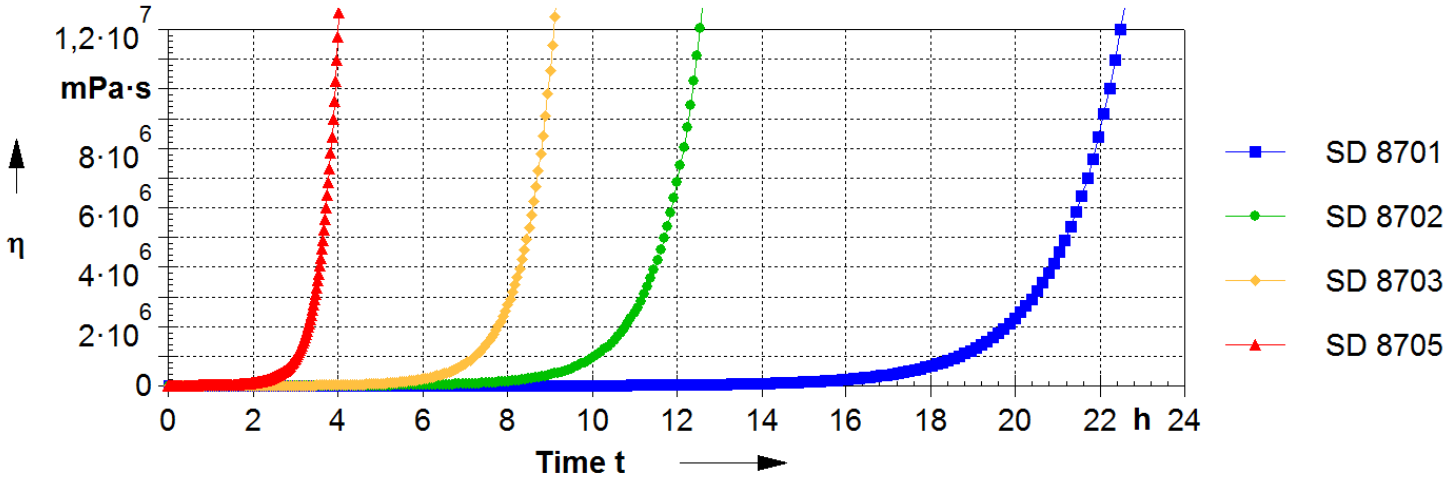

@ 30 °C

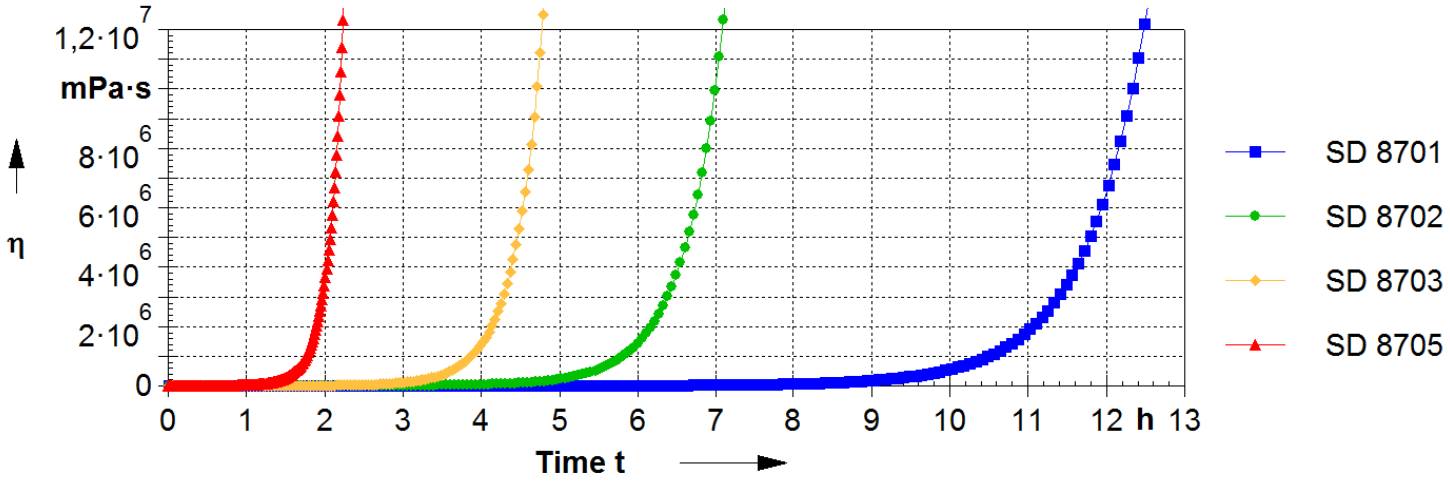
1,2·10^7
mPa·s
8·10^6
6·10^6
4·10^6
2·10^6
0
η
0 1 2 3 4 5 6 7 8 9 10 11 12 h 13
Time t
SD 8701
SD 8702
SD 8703
SD 8705

Mechanical properties on cast resin :

		SR 8500 / SD 8705			SR 8500 / SD 8703		
Curing cycles →		24 h @ TA + 48 h @ 40 °C	24 h @ TA + 16 h @ 60 °C	24 h @ TA + 8 h @ 80 °C	24 h @ TA + 48 h @ 40 °C	24 h @ TA + 16 h @ 60 °C	24 h @ TA + 8 h @ 80 °C
Tensile							
Modulus	N/mm^2	3 847	3 723	3 659	3 719	3 589	3 399
Maximum strength	N/mm^2	72	81	85	78	83	77
Breaking Strength	N/mm^2	72	81	79	78	78	73
Elongation at max strength	%	2,5	3,2	4,3	2,7	4	4,1
Elongation at break	%	2,5	3,2	6,2	2,7	5,2	5,3
Flexion							
Modulus	N/mm^2	3 649	3 549	3 393	3 531	3 375	3 235
Maximum strength	N/mm^2	121	135	135	126	128	122
Breaking Strength	N/mm^2	121	123	113	113	97	104
Elongation at max strength	%	3,6	4,9	5,7	4,6	5	5,4
Elongation at break	%	3,7	6,2	8,6	8,1	7,8	8,1
Shear							
Breaking Strength	N/mm^2	48	52	55	46	49	47
Compression							
Modulus	N/mm^2						
Yield strength	N/mm^2	117	117	114	109	110	100
Offset compression yield	%	13,1	13,7	14,4	12,5	13,1	14
Charpy impact strength							
Resilience	kJ/m^2	13	21	11	18	26,2	32
DSC glass transition							
TG1 onset	°C	70	82	87	70	76	80
TG1 max onset	°C			93			88
DTMA glass transition							
TG tan delta	°C						
TeiG onset G'	°C						
TmG midpoint G'	°C						
TefG endpoint	°C						
TG peak G ''	°C						

Mechanical properties on cast resin :

		SR 8500 / SD 8702			SR 8500 / SD 8701		
Curing cycles →		24 h @ TA + 48 h @ 40 °C	24 h @ TA + 16 h @ 60 °C	24 h @ TA + 8 h @ 80 °C	24 h @ TA + 48 h @ 40 °C	24 h @ TA + 16 h @ 60 °C	24 h @ TA + 8 h @ 80 °C
Tensile							
Modulus	N/mm^2	3 630	3 455	3 253	3 700	3 070	2 800
Maximum strength	N/mm^2	75	80	72	72	76	69
Breaking Strength	N/mm^2	71	76	65	72	72	64
Elongation at max strength	%	2,9	3,9	4,2	2,7	3,9	4
Elongation at break	%	3,4	4,6	6,1	2,7	4,7	4,8
Flexion							
Modulus	N/mm^2	3 368	3 278	3 052	3 300	3 280	3 050
Maximum strength	N/mm^2	121	123	114	122	120	112
Breaking Strength	N/mm^2	108	88	93		-	
Elongation at max strength	%	4,5	5,1	5,4	4,5	5,3	5,4
Elongation at break	%	6,2	8,1	8,7		9,1	10,7
Shear							
Breaking Strength	N/mm^2	45	46	44			
Compression							
Modulus	N/mm^2						
Yield strength	N/mm^2	105	102	94	106	98	91
Offset compression yield	%	11,7	12,8	13,2	11,2	6,2	7,4
Charpy impact strength							
Resilience	kJ/m^2	18	23	32	19	54	65
DSC glass transition							
TG1 onset	°C	67	77	93	66	76	87
TG1 max onset	°C			88			87
DTMA glass transition							
TG tan delta	°C						
TeiG onset G'	°C						
TmG midpoint G'	°C						
TefG endpoint	°C						
TG peak G ''	°C						

Tests carried out on samples of pure cast resin, without prior degassing, between steel plates.

Measures undertaken according to the following norms:

Mechanical tests:

Tension:	*NF EN ISO 527-2:2012*
Flexion:	*NF EN ISO 178:2011*
Compression:	*NF EN ISO 604:2004 or NF EN ISO 844:2014 (foam product)*
Charpy impact strength:	*NF EN ISO 179-1:2010*
Shear Strength:	*ASTM D732–17 (Punch Tool)*
Interlaminar shrinkage strength:	*ASTM D5528-13*
Toughness (GIC et KIC) :	*ISO 13586:2000*
Water absorption:	*Internal. Polymerization according to cycle, machining, weighing, time spent in distilled water at 70 °C / 48 hours, weighing 1 hour after emerging,*
Bonding Strength Double lap shear:	*ASTM D3528-96* *ADH = adhesive failure* *COH = cohesive failure* *TLC = thin-layer cohesive failure* *FT = fiber-tear failure.* *LFT = light-fiber-tear failure*

Thermal tests:

Glass transition DSC:	*NF EN ISO 11357-2:2014*	*-5°C to 180 °C under nitrogen gas*
	T_{G1} or Onset:	*1st scan at 20 °C/min*
	T_{G1} maximum or Onset:	*2nd scan at 20 °C/min*
Glass transition DTMA:	*Temperature ramp 0 °C to 180 °C @ 2°C/min under normal atmosphere*	
	NF EN ISO 11357-1:2016	*T_G onset G'*
	ASTM D4065-12	*T_G peak G''*

Physical tests:

Gardner color:	*NF EN ISO 4630:2016*	*Visual method*
Refractive index:	*NF ISO 280:1999*	
Viscosity:	*NF EN ISO 3219:1994*	*Rheometer 50 mm, shear 10 s^{-1}*
Density on liquids:	*ISO 2811-1:2016*	*Pycnometer*
Density on solid:	*NF EN ISO 1183-3:1999*	*Helium Pycnometer*
Density on foam:	*NF EN ISO 845:2009*	
Gel time:	*Cross G' G''*	*Rheometer CP50 - Shear rate 10 s^{-1}*
Green Carbone content:	*ASTM D6866-16 or XP CEN/TS 16640 Avril 2014*	

TA:	*Ambient temperature (20 to 25 °C)*
NC:	*No information Communicated*
NB:	*No Breaking (maximum flexion deformation : 15 %)*

Table 1st page:

Pot Life:	*Time to reach 50 °C or time limit for use*
Gel time:	*Intersection of tangents on the viscosity curve of 1 mm thick layer*
Release time:	*Time required to obtain sufficient mechanical strength to release*
Minimum Vacuum Time:	*Time in which vacuum can be applied (25000 mPa.s)*
Maximum Vacuum time:	*Limit time below which a vacuum can be applied (G'G " crossing)*
Optimum Infusion time:	*Time to reach 400 mPa.s*
Max Infusion Time:	*Time to reach 25000 mPa.s*
Vacuum cut-off time:	*Time to reach G'G " crossover + 20%*

LEGAL NOTES:
Information given in writing or verbally, in the context of our technical assistance and our trials, does not engage our responsibility. Information is given in good faith based on SICOMIN's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with SICOMIN's recommendations. We advise users of SICOMIN products to check by some practical trials that they are suitable for the intended processes and applications. The customer's storage, the use, the implementation and the transformation of the supplied products are not under SICOMIN's control and entirely under the sole responsibility of the user.
SICOMIN reserves the right to change the properties of its products. All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data and tolerance may vary due to circumstances beyond our control.
If our responsibility should nevertheless be involved, it would be, for all the damages, limited to the value of the goods supplied by us and processed by the customer. We guaranty the non-reproachable quality of our products, in the general context of sales and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Mix

SR 8500	Resin part + Hardener part (kg)	Resin part (kg)	Hardener part (kg)
SD 8705	270 32,1 7,94 1,62	200 23,74 5,88 1,2	4 x 17,5 8,36 2,06 0,42
SD 8703	270 32,1 7,94 1,62	200 23,74 5,88 1,2	200 23,74 5,88 1,2
SD 8702	270 32,1 7,94 1,62	200 23,74 5,88 1,2	200 23,74 5,88 1,2
SD 8701	270 32,1 7,94 1,62	200 23,74 5,88 1,2	200 23,74 5,88 1,2